

# Keilton + autani

## WP1018S Series

8-Key Line Voltage BT Wall Switch



WP1018S.A0

### Description

The Keilton+autani WP1018S is a line-voltage Bluetooth wireless wall switch. It provides wireless control of Keilton+autani devices, enabling ON/OFF, DIM+, and DIM- functions. WP1018S can be used to retrofit a standard wall switch.

### Features

- 120-277VAC
- Ideal retrofit of existing wall controls (neutral is required)
- Quick push-button control of Keilton+autani devices via Bluetooth
- Bluetooth 5.0 network technology enables the switch to be linked to one or more light groups via the Keilton+autani app

### Requirements

- Requires a Decora switch plate (not included)


### Specifications

<b>Input Voltage</b>	AC120-277V
<b>Frequency</b>	50/60Hz
<b>Input Current</b>	10mA Max
<b>Bluetooth Transmit</b>	100ft Max
<b>Radio Frequency</b>	2.4GHz ± 75MHz
<b>Bluetooth Version</b>	5.0
<b>Housing Material</b>	UL 94-5VA
<b>Operating Temperature</b>	0°C to 40°C, 32°F to 104°F
<b>Storage Temperature</b>	-30°C to 85°C, -22°F to 185°F
<b>IP Rating</b>	IP20
<b>Color</b>	Plate/White, Housing/Black
<b>Warranty</b>	5 year warranty
<b>Compliance</b>	UL60730, UL1376, RoHS
<b>Safety</b>	cULus Listed LED Controller E347437 FCC ID: 2A26YWP1018S DID: D061367 DLC: NLTRC5KLOTN

### Ordering Information


Model	Description
WP1018S.A0	8-Key Line Voltage BT Wall Switch

## Wiring




## Dimensions

Unit:inch/mm

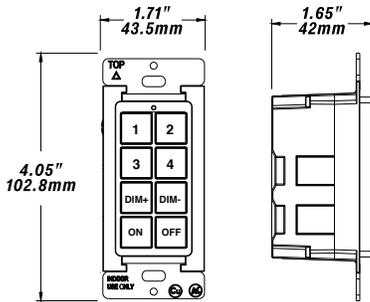

## Product Label

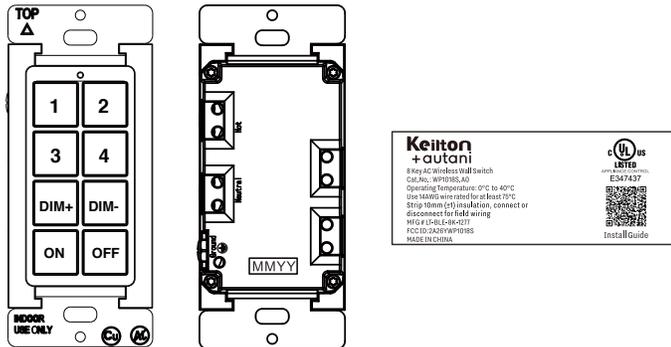

The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by LiteTrace is under license. Other trademarks and trade names are those of their respective owners.

## App Download



Due to our continued efforts to improve our products, specifications are subject to change without notice.

## Contact Us

7001 Columbia Gateway Drive, Suite 210, Columbia, MD 21046, USA

T: +1 443-320-2233 (M-F 9am-5pm ET)

E: support@autani.com

Revised on 09-05-2025